




FSU

The
Patent
Office

GB00/390

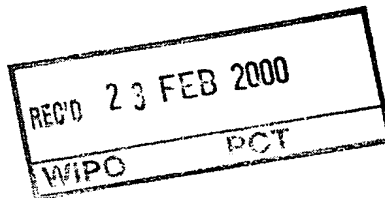

PCT/GB 00 / 00390

09 FEBRUARY 2000

INVESTOR IN PEOPLE

09/913433


The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

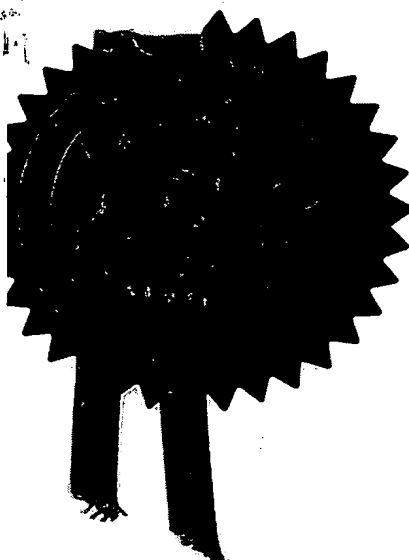

Signed

KAR cheneb

Dated

16 FEB 2000

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

THIS PAGE BLANK (USPTO)

Patents Form 1/77

Patents Act 1977

The
Patent
Office

15FEB99 E425323-1 001091
P01/7700 0.001- 9903320.1

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

THE PATENT OFFICE
A
15 FEB 1999
RECEIVED BY FAX

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

1. Your reference

PFC 1444 GB

2. Patent application number

(The Patent Office will fill in this part)

9903320.1

3. Full name, address and postcode of the or of each applicant (underline all surnames)

JOHNSON MATTHEY PUBLIC LIMITED COMPANY
2-4 COCKSPUR STREET
TRAFALGAR SQUARE
LONDON SW1Y 5BQ

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

GB

536268007

4. Title of the invention

SUBSTRATES

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

IAN CARMICHAEL WISHART
JOHNSON MATTHEY TECHNOLOGY CENTRE
BLOUNTS COURT
SONNING COMMON
READING RG4 9NH

Patents ADP number (if you know it)

3991411001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

a) any applicant named in part 3 is not an inventor, or

b) there is an inventor who is not named as an applicant, or

c) any named applicant is a corporate body.

See note (d))

15-FEB-1999 15:10

FROM JOHNSON MATTHEY

TO

PATENT OFFICE

P.04

Patents Form 1/77

THE PATENT OFFICE

A

15 FEB 1999

RECEIVED BY FAX

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

0

Description

11 ✓

Claim(s)

4 ✓

Abstract

1 ✓

Drawing(s)

2 ✓

SMB

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

One

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature



Date

15/2/99

J E SWIFT

12. Name and daytime telephone number of person to contact in the United Kingdom

MRS F E STRANGE 0118 924 2125

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

1444

DUPLICATE

1

SUBSTRATES

The present invention relates to a novel porous substrate web, a porous gas diffusion substrate and a porous gas diffusion electrode which may have application in electrochemical devices, for use for example in a fuel cell, and a process for the manufacture of the web, substrate and electrode.

Electrochemical cells invariably comprise at their fundamental level a solid or liquid electrolyte and two electrodes, the anode and cathode, at which the desired electrochemical reactions take place. Gas diffusion electrodes are employed in a range of electrochemical devices, in which a gaseous reactant and/or product has to be diffused into and/or out of one of the cell electrode structures. They are designed to optimise the contact between the reactant and the electrolyte to maximise the reaction rate. Electrocatalysts are often incorporated into gas diffusion electrode structures to increase the rates of the desired electrode reactions.

Gas diffusion electrodes are employed in many different electrochemical devices, including metal-air batteries, electrochemical gas sensors, electrosynthesis of useful chemical compounds, and in particular, fuel cells. Conventionally, gas diffusion electrodes comprise many components and are typically made up of one, two or even more layers of these components. Typically the gas diffusion electrode will comprise one or more electrocatalyst containing layers, which are supported onto a more rigid porous substrate layer.

A fuel cell is an energy conversion device that efficiently converts the stored chemical energy of its fuel into electrical energy by combining either hydrogen, stored as a gas, or methanol stored as a liquid or gas, with oxygen to generate electrical power. The hydrogen or methanol are oxidised at the anode and oxygen is reduced at the cathode. Both electrodes are of the gas diffusion type. The electrolyte has to be in contact with both electrodes and may be acidic or alkaline, liquid or solid, in nature. In proton exchange membrane fuel cells (PEMFC), the electrolyte is a solid proton-conducting polymer membrane, commonly based

1444

2

on perfluorosulphonic acid materials, and the combined structure formed from the membrane and the two gas diffusion electrodes is known as a membrane electrode assembly (MEA). Alternatively, the MEA may be formed from two porous gas diffusion substrates and a solid proton-conducting polymer membrane catalysed on both sides; or the MEA may
5 be formed from one gas diffusion electrode and one gas diffusion substrate and a solid proton-conducting polymer catalysed on the side facing the gas diffusion substrate. The anode gas diffusion electrode or substrate is designed to be porous and to allow the reactant hydrogen or methanol to enter from the face of the electrode or substrate exposed to the reactant fuel supply, and then to diffuse through the thickness of the electrode or substrate to
10 the reaction sites which contain electrocatalysts, usually platinum metal based, to maximise the electrochemical oxidation of hydrogen or methanol. The anode is also designed to allow electrolyte to penetrate through the face of the electrode or substrate exposed to the electrolyte and to also contact the same reaction sites. With acidic electrolyte types the product of the anode reaction are protons and these can then be efficiently transported from
15 the anode reaction sites through the electrolyte to the cathode gas diffusion electrode or substrate. The cathode is also designed to be porous and to allow oxygen or air to enter the electrode or substrate and diffuse through to the reaction sites. Electrocatalysts are again commonly incorporated to maximise the rate of the reaction at the cathode reaction sites which combines the protons with oxygen to produce water. Product water then has to
20 diffuse out of the cathode structure. The structure of the cathode has to be designed such that it enables the efficient removal of the product water. If water builds up in the cathode, it becomes more difficult for the reactant oxygen to diffuse to the reaction sites, and thus the performance of the fuel cell decreases. However, in the case of proton exchange membrane electrolytes, if too much water is removed from the cathode structure, the membrane dries
25 out and the performance of the fuel cell also decreases.

Traditionally, the gas porous substrates used in the PEMFC are based on high density materials such as rigid carbon fibre paper (i.e. Toray TGP-H-60 or TGP-H-90 from Toray Europe Ltd., 7 Old Park Lane, London, W1Y 4AD), with a bulk density of 0.49g/cm^3 or
30 woven carbon cloths, such as Zoltek PWB-3 (Zoltek Corporation, 3101 McKelvey Road, St. Louis, Missouri 63044) with a bulk density of 1.75g/cm^3 . Substrates such as these generally

I 1444

3

have good water management properties but either do not easily allow the passage of the reactant gases, in the case of the carbon fibre paper, or lack dimensional stability, as the cloth can easily be stretched in the directions of the major planar faces (x and y directions). In addition, these types of material are expensive when compared to the material cost estimates needed to make fuels cells competitive with existing technologies, particularly in respect of mobile applications such as cars and buses.

More recently, electrode structures based on a porous substrate comprising a non-woven network of carbon fibres, with a particulate material embedded within the fibre network as disclosed in EP 0 791 974 have shown comparable performances to structures based on carbon fibre paper or cloth, without the drawbacks of such materials, and at much lower fibre bulk densities, typically below 0.1g/cm^3 . Electrodes based on non-woven carbon fibre structures such as Optimat 203, of bulk density 0.07g/cm^3 (from Technical Fibre Products, Kendal, Cumbria, UK) give a physically strong, dimensionally stable and handleable structure at a cost compatible with motive power applications. However, although the gas diffusion properties of such substrates are very good, the structure lacks the ability to retain sufficient water, when operating at high current densities, to maintain optimum hydration of the membrane. As a consequence the resistance of the membrane increases with a commensurate loss in overall performance.

20

It is therefore an object of the present invention to provide a porous substrate, suitable for use for example in a gas diffusion electrode, which maintains the strength and flexibility of the non-woven carbon fibre network substrate and retains the good gas diffusion properties, but also has greatly improved water management properties. Control of these properties is highly important to ensure the optimum functioning of the PEMFC which may operate under a range of conditions of, for example, temperature, pressure, reactant gas flow rates and reactant gas level of humidification.

Accordingly, the present invention provides a non-woven fibre web comprising a plurality of fibres in the x- and y-directions of average length greater than 5mm and a plurality of fibres of average length less than 3mm wherein at least a proportion of the fibres

30

1444

4

of average length less than 3mm are orientated in the z-direction, and wherein the proportion of fibres of average length less than 3mm is at least 20% of the total weight of fibres, and wherein the density of the non-woven fibre web is from 0.1g/cm^3 to 0.35g/cm^3 . Alternatively, the present invention provides a non-woven fibre web comprising up to and including 80% by weight of fibres in the x- and y-directions of average length greater than 5mm, and 20% or more by weight of fibres of average length less than 3mm wherein at least a proportion of the fibres of average length of less than 3mm are orientated in the z-direction, and wherein the density of the non-woven fibre web is from 0.1g/cm^3 to 0.35g/cm^3 .

10

The fibres of average length of greater than 5mm (the "longer fibres") impart physical strength to the web, whilst the fibres of average length of less than 3mm (the "shorter fibres") enable the density of the web to be increased beyond that which is possible with longer fibres alone. As the proportion of shorter fibres increases so the strength of the web decreases and accordingly the proportion of shorter fibres is suitably no more than 85% by weight of total fibres in the substrate, preferably no more than 70% by weight of the total fibres.

The longer fibres will all be orientated in the x- and y-directions, while the shorter fibres may be orientated in the x-, y- and z-directions.

The longer fibres are of average length greater than 5mm and suitably have a maximum average length of 50mm. The preferred average length of the fibres is 5mm to 30mm. The diameter of the longer fibres is typically in the range of $0.2\mu\text{m}$ to $25\mu\text{m}$, preferably in the range of $2\mu\text{m}$ to $20\mu\text{m}$.

The shorter fibres are of average length less than 3mm and suitably are of average length less than 2mm, preferably less than 1mm. The shorter fibres suitably have a minimum average length of $50\mu\text{m}$, preferably $100\mu\text{m}$. The diameter of the shorter fibres is typically in the range of $0.1\mu\text{m}$ to $20\mu\text{m}$, preferably in the range of $0.4\mu\text{m}$ to $10\mu\text{m}$.

1444

5

Fibres which are suitable for use for the longer fibres and the shorter fibres include carbon, glass, silica, polymer, metal or ceramic fibres, preferably carbon, silica, metal or ceramic, most preferably carbon. The fibres used to the longer and shorter fibres may be of the same material or different.

5

The density of the non-woven fibre web is suitably greater than 0.1g/cm^3 ; suitably the maximum density of the non-woven fibre web is 0.35g/cm^3 . The preferred range is from 0.1g/cm^3 to 0.2g/cm^3 .

10 The fibres in the web are held together by a polymer (the "final polymer"). Depending on the polymeric substance used it may also contribute to the essential electrode structural properties in a gas diffusion substrate or electrode, such as control of the hydrophobic/hydrophilic balance. Examples of such polymers include polytetrafluoroethylene (PTFE), fluorinated ethylene-propylene (FEP), polyvinylidene
15 difluoride (PVDF), Viton A, polyethylene, polypropylene, ethylene-propylene. The preferred final polymer is PTFE or FEP.

The non-woven web may be made by a single individual process or by adapting a continuous manufacturing process, such as paper making. In both cases the fibres (long and
20 short) are dispersed in solution, preferably water, to form a slurry. Also added to the slurry are one or more polymers (the "first polymer"), preferably hydrophilic polymers, for example polyvinylalcohol (PVA). The first polymer may be in the form of fibres. Once the long and short fibres and the first polymer are uniformly dispersed in the liquid, the liquid is either drained in the case of a single individual process or the fibres are formed into a
25 continuous structure by the controlled deposition of the slurry onto a moving bed mesh. The web so-formed is dried in an oven, and if necessary placed in a solution of the final polymer, which may or may not be the same as the first polymer, allowed to dry and subsequently heat treated to set the final polymer, if used, or to set the first polymer. If it is not desirable for the first polymer to remain in the final web structure, it may be removed by this heat
30 treatment or by an alternative appropriate process. In addition, any undesirable residues may be removed by the heat treatment or by an alternative appropriate process.

I 1444

6

A second embodiment of the invention provides a gas diffusion substrate comprising a non-woven fibre web as hereinbefore defined and a filler material. The filler material is for the purpose of providing suitable gas diffusion, electrical conductivity and water management properties when employed as a gas diffusion substrate. Suitably, the filler material comprises a particulate carbon and a polymer, the carbon suitably being in the form of a powder. The carbon powder may be any of the materials generally designated as carbon black such as acetylene blacks, furnace blacks, pitch coke based powders and graphitised versions of such materials. Suitably also both natural and synthetic graphites may be used in this application. Such materials may be used either alone or in combination. The particulate carbon, or carbons, in the fill are held together by one or more polymers. The polymeric materials used will contribute to the essential electrode structural properties such as control of the hydrophobic/hydrophilic balance. Examples of such polymers include polytetrafluoroethylene (PTFE), fluorinated ethylene-propylene (FEP), polyvinylidene difluoride (PVDF), Viton A, polyethylene, polypropylene, ethylene-propylene. The preferred final polymer is PTFE or FEP.

The filler material may further comprises a catalyst other than an electrocatalyst, for example a gas phase catalyst, which is designed to remove contaminant gases in the fuel or oxidant feed streams as for example carbon monoxide in the hydrogen fuel, when this is supplied from a reformer.

The most appropriate method for the manufacture of the gas diffusion substrate is to prepare the non-woven fibre web, for example using the method hereinbefore described, and subsequently in-filling with the filler material. The majority of the filler material will be forced into the structure of the non-woven fibre web, although a small quantity may remain on the surface. Alternatively, a continuous manufacturing process similar to that used to prepare the non-woven fibre web may be used, the filler material being added to the slurry.

A third aspect of the invention provides a gas diffusion electrode comprising a gas diffusion substrate as hereinbefore described and an electrocatalyst material. The electrocatalyst material is applied as a thin layer to the surface of the gas diffusion substrate.

1444

7

Some of the electrocatalyst material may penetrate slightly into the substrate, the remaining material forming a layer on the surface of the substrate. The electrocatalyst material comprises one or more electrocatalytic components and a polymer. Suitable polymers include hydrophobic polymers, such as PTFE and/or proton conducting polymers, such as Nafion[®]. The electrocatalytic component is defined as a substance that promotes or enhances the rate of the electrochemical reaction of interest but remains unaltered by the reaction. The electrocatalytic component or components selected will depend on the application for which the gas diffusion electrode is being used. These may be, for example, a precious metal or a transition metal as the metal or metal oxide, either unsupported or supported in a dispersed form on a carbon support; a carbon or an organic complex, in the form of a high surface area finely divided powder or fibre, or a combination of these options. An example of a suitable electrocatalyst material is described in EP 0731520.

A fourth aspect of the invention provides a membrane electrode assembly comprising a gas diffusion electrode of the invention as hereinbefore defined and a second gas diffusion electrode which may or may not be an electrode according to the invention, and a solid polymer membrane, for example Nafion[®]. Alternatively, the invention provides a membrane electrode assembly comprising a gas diffusion electrode of the invention as hereinbefore defined, a gas diffusion substrate which may or may not be a substrate according to the invention and a solid polymer membrane, for example Nafion[®], wherein an electrocatalyst layer is applied to the side of the membrane facing the gas diffusion substrate. Alternatively, the invention provides a membrane electrode assembly comprising a gas diffusion substrate of the invention as hereinbefore defined, a gas diffusion electrode which may or may not be an electrode according to the invention and a solid polymer membrane, for example Nafion[®], wherein an electrocatalyst layer is applied to the side of the membrane facing the gas diffusion substrate. Alternatively, the invention provides a membrane electrode assembly comprising a gas diffusion substrate of the invention as hereinbefore defined and a second gas diffusion substrate which may or may not be a substrate according to the invention, and a solid polymer membrane, for example Nafion[®], wherein an electrocatalyst layer is applied to both sides of the solid polymer membrane.

I 1444

8

A still further aspect of the invention provides a fuel cell comprising a gas diffusion substrate according to the present invention. A further aspect provides a fuel cell comprising a gas diffusion electrode according to the present invention.

5 The invention will now be further described with reference to the following examples.

The materials of the invention can be employed as either the anode or cathode, and indeed both anode and cathode in the electrochemical cells of the specific application. In the following examples, the electrodes are incorporated as the cathode in membrane electrode
10 assemblies (MEAs) and evaluated in a proton exchange membrane fuel cell, with hydrogen as the anode fuel and air or pure oxygen as the cathode oxidant. It is at the cathode that the majority of cell performance (voltage) losses occur in cells operating with hydrogen as the fuel. The MEAs were fabricated by hot pressing the anode and cathode against each face of the solid proton conducting electrolyte membrane as is commonly practiced in the art.

15

The anodes were of the more conventional type, currently widely employed in the PEMFC. They comprised a convention pre-teflonated rigid conducting carbon fibre paper substrate (Toray TGP-H-090, available from Toray Industries Inc., Tokyo, Japan) to which was applied a layer of a 20wt% platinum, 10wt% ruthenium catalyst, supported on Cabot
20 Vulcan XC72R (from Johnson Matthey Inc., New Jersey, USA), at an electrode platinum loading of $0.25\text{mg}/\text{cm}^2$ of electrode geometric area. The MEAs were evaluated in a PEMFC single cell, with a geometric electrochemically active area of 240cm^2 . The single cell consisted of graphite plates into which flowfields were machined to distribute reactant gases and humidification water, and remove products. The MEA was located between the
25 flowfield plates. The operation of the single cell was controlled from a purpose built test station facility. The "performance" of the fuel cell was assessed by measuring the voltage and current density relationship using a standard operating procedure. Unless otherwise stated, these conditions were typically, a reactant gas inlet temperature of 80°C , a pressure of both anode and cathode reactant gases of 3 atmosphere, and a reactant stoichiometry of 1.5
30 for hydrogen and 2.0 for air.

F 1444

9

Comparative Example 1

A preformed non-woven carbon fibre paper of density 17g/m^2 (equivalent to 0.07g/cm^3) (Optimat 203, Technical Fibre Products, Kendal, Cumbria, UK), was precoated with PTFE by soaking the paper for 1 minute in a solution of 20 parts by weight of PTFE emulsion (ICI Fluon dispersion GP1) in 500 parts by weight of water then draining and allowing to dry. The coated carbon fibre paper was heated to 350°C in air to sinter the PTFE.

The particulate material (the "filler material") used for embedding within the fibre network was provided by dispersing 47 weight parts of acetylene black (Shawinigan black from Chevron Chemicals, Houston, Texas, USA) in 1200 parts of water. To this was added 3 weight parts of polytetrafluoroethylene (PTFE) as a dispersion in water (ICI Fluon dispersion GP1, 64wt% solids suspension) and the mixture stirred to entrain the PTFE particles within the carbon black. The resultant material was dispersed using a high shear mixer (Silverson L4R) to produce a smooth mixture.

The particulate material was pressed into the non-woven carbon fibre structure from one side, and leveled off using a metal edge. The sheet was then dried at 200°C for 1 minute. A further thin layer of the particulate material was applied to the same side; the structure was sandwiched between two sheets of filter paper and passed through a set of rollers to compact the layer. The sheet was then dried at 200°C for 1 minute. This process was then repeated for the second side. Further additions of thin layers of the particulate material were applied to each side with compaction and drying until a loading of 3.3mg/cm^2 of carbon was achieved. The resulting gas diffusion substrate sheet was fired, in air, to 300°C for 30 minutes.

A catalyst material used for forming the electrocatalyst layer on the gas diffusion substrate was provided by dispersing 100 weight parts of a 40 weight % platinum on carbon black (Johnson Matthey FC40) in 30 parts of Nafion EW1100 (E I DuPont De Nemours & Co.) as a 9.5 weight % dispersion in water, according to methods described in EP 0 731 520.

F 1444

10

The particulate catalyst was dispersed using a high shear mixer (Silverson L4R) to produce a smooth ink

5 A layer of the catalyst material was then applied to the top face of the filled non-woven gas diffusion substrate, to give a loading of 0.71mg of platinum/cm². The electrode formed the cathode of an MEA, with the platinum electrocatalyst layer bonded to the membrane electrolyte face. The membrane employed was DuPont Nafion 112. The single cell results, on air and oxygen are shown in Figures 1 and 2 respectively.

10

Example 2

1.0g of chopped carbon fibres at a fibre length of 6mm, and 1.0g of chopped carbon fibres at a fibre length of 12mm (type RK 10 supplied by RK Carbon Fibres Ltd.) along with 1.0g of carbon fibre wool (type FRC 15 supplied by Le Carbone (Great Britain) Ltd.,
15 Portslade, Sussex, UK) and 0.2g of polyvinyl alcohol fibres (type Mewlon SML supplied by Unitika Ltd., Oosaka 541, Japan) were dispersed in 3 litres of water using a standard catering blender. The resulting dispersion was used to prepare a sample of non-woven sheet of size 330mm diameter (855.3cm²) in a custom built sheet former (similar in general operation to a standard SCA sheet former, as supplied by AB Lorentzen & Wettre, Box 4, S-163 93
20 Stockholm, Sweden). The sheet was dried at 100°C in air.

The non-woven carbon fibre sheet was placed on a sheet of PTFE (skived sheet from Dalau Ltd., Clacton-on-sea, Essex, UK) and sprayed with a suspension of PTFE 2.3g (ICI Fluon dispersion GP1, 64wt% solids suspension) in 10g of water. Half of the suspension
25 was sprayed on the first side, the sheet dried at 120°C, and the other side sprayed with the remaining suspension. The resulting sheet was fired, in air, to 340°C for 15 minutes, to give a 30% loading of PTFE.

The particulate material (prepared as described in Comparative Example 1) was
30 pressed into the non-woven carbon fibre sheet from one side, and leveled off using a metal edge. The sheet was then dried at 200°C for 1 minute. A further thin layer of the particulate material was applied to the same side; the structure was sandwiched between two sheets of filter paper and passed through a set of rollers to compact the layer. The sheet was then

I 1444

11

dried at 200°C for 1 minute. This process was repeated for the second side. Further additions of thin layers of the particulate material were applied alternately to each side, with compaction and drying, until a loading of 3.3mg/cm² of carbon was achieved. The resulting gas diffusion substrate sheet was fired, in air, to 300°C for 30 minutes.

5

A catalyst material used for forming the electrocatalyst layer on the gas diffusion substrate was provided as in Comparative Example 1.

10 A layer of the electrocatalyst material was then applied to the top face of the filled non-woven gas diffusion substrate, to give a loading of 0.8mg of platinum/cm².

The electrode formed the cathode of an MEA, with the platinum catalyst layer bonded to the membrane electrolyte face. The membrane employed was DuPont Nafion 112. The single cell results, on air and oxygen are shown in Figures 1 and 2 respectively.

15

The cell potential versus current density performance of Comparative Example 1 is typical of the performance of an electrode produced by filling conventional non-woven carbon structures. The gas diffusion properties of such substrates are very good, with the fall off in air performance above 1200mA/cm² being due to the structures inability to retain
20 sufficient water to maintain optimum hydration of the membrane, when operating at high current densities. As a consequence, the resistance of the membrane increases with increasing current density giving rise to a commensurate loss in overall performance. This is also seen in the fall off in oxygen performance, with increasing current density at a similar point to the air operation (the use of oxygen by removing the mass transport issues seen with
25 air operation confirms that the losses on air are not due to mass transport effects) as shown in Figures 1 and 2.

The structure of the non-woven gas diffusion substrate of the invention, overcomes these problems of water retention and maintains membrane hydration out to much higher
30 current densities on both air and oxygen operation as can be seen from the cell potential versus current density plots for Example 2 in Figures 1 and 2.

1444

12

CLAIMS

1. A non-woven fibre web comprising a plurality of fibres in the x- and y-directions of average length greater than 5mm ("longer fibres") and a plurality of fibres of average length
5 less than 3mm ("shorter fibres") wherein at least a proportion of the fibres of average length less than 3mm are orientated in the z-direction, and wherein the proportion of fibres of average length less than 3mm is at least 20% of the total weight of fibres, and wherein the density of the non-woven fibre web is from 0.1g/cm^3 to 0.35g/cm^3 .
- 10 2. A non-woven fibre web comprising up to and including 80% by weight of fibres in the x- and y-directions of average length greater than 5mm ("longer fibres"), and 20% or more by weight of fibres of average length less than 3mm ("shorter fibres") wherein at least a proportion of the fibres of average length of less than 3mm are orientated in the z-direction, and wherein the density of the non-woven fibre web is from 0.1g/cm^3 to
15 0.35g/cm^3 .
3. A non-woven fibre web according to claim 1 or claim 2 wherein the proportion of shorter fibres is suitably no more than 85% by weight of total fibres in the substrate.
- 20 4. A non-woven fibre web according to claim 3 wherein the proportion of shorter fibres is suitably no more than 70% by weight of the total fibres.
5. A non-woven fibre web according to any of claims 1 to 4 wherein the longer fibres suitably have a maximum average length of 50mm.
25
6. A non-woven fibre web according to claim 5 wherein the longer fibres are of average length of 5mm to 30mm.
7. A non-woven fibre web according to any preceding claim wherein the shorter fibres
30 are of average length less than 2mm.

P.1444

13

8. A non-woven fibre web according to claim 7 wherein the shorter fibres are of average length less than 1mm.

9. A non-woven fibre web according to any preceding claim wherein the shorter fibres
5 have an average minimum length of 50µm.

10. A non-woven fibre web according to any preceding claim wherein the longer fibres and shorter fibres are independently selected from the group consisting of carbon, glass, silica, polymer, metal and ceramic fibres.

10

11. A non-woven fibre web according to claim 10 wherein the longer fibres and shorter fibres are carbon.

12. A non-woven fibre web according to any preceding claim wherein the density of the
15 non-woven fibre web is from 0.1g/cm³ to 0.2g/cm³.

13. A process for the preparation of a non-woven fibre web according to any preceding claim, said process comprising the steps of:

- (i) dispersing the longer and shorter fibres in solution to form a slurry;
- 20 (ii) adding one or more polymers (the "first polymer") to the slurry;
- (iii) draining the liquid from the slurry to form a web, or forming a continuous structure by the controlled deposition of the slurry onto a moving bed mesh;
- (iv) drying the web;
- (v) optionally placing the web in a solution of polymer (the "final polymer");
- 25 (vi) drying the web; and
- (vii) heat treating the web.

14. A gas diffusion substrate comprising a non-woven fibre web as claimed in any one of claims 1 to 12, and a filler material.

30

1444

14

15. A gas diffusion substrate according to claim 14 wherein the filler material comprises particulate carbon and a polymer.
16. A gas diffusion substrate according to claim 14 or claim 15 wherein the filler
5 material comprises a catalyst material.
17. A gas diffusion electrode comprising a gas diffusion substrate as claimed in any one of claims 14, 15 and 16, and an electrocatalyst material.
- 10 18. A gas diffusion electrode according to claim 17, wherein the electrocatalyst material comprises one or more electrocatalytic components and a polymer.
19. A gas diffusion electrode according to claim 18, wherein the electrocatalyst material is a precious metal or a transition metal as the metal or metal oxide, either unsupported or
15 supported in a dispersed form on a carbon support; a carbon or an organic complex, in the form of a high surface area finely divided powder or fibre, or a combination of these options.
20. A membrane electrode assembly comprising a gas diffusion electrode as claimed in any one of claims 17, 18 and 19, a second gas diffusion electrode which may or may not be
20 an electrode as claimed in any one of claims 17, 18 and 19, and a solid polymer membrane.
21. A membrane electrode assembly comprising a gas diffusion electrode as claimed in any one of claims 17, 18 and 19, a gas diffusion substrate which may or may not be a substrate as claimed in any one of claims 14, 15 and 16, and a solid polymer membrane,
25 wherein an electrocatalyst layer is applied to the side of the membrane facing the gas diffusion substrate.
22. A membrane electrode assembly comprising a gas diffusion substrate as claimed in any one of claims 14, 15 and 16, a gas diffusion electrode which may or may not be an
30 electrode as claimed in any one of claims 17, 18 and 19, and a solid polymer membrane,

F 1444

15

wherein an electrocatalyst layer is applied to the side of the membrane facing the gas diffusion substrate.

23. A membrane electrode assembly comprising a gas diffusion substrate as claimed in
5 any one of 14, 15 and 16, and a second gas diffusion substrate which may or may not be a
substrate as claimed in any one of claims 14, 15 and 16, and a solid polymer membrane,
wherein an electrocatalyst layer is applied to both sides of the solid polymer membrane.

24. A fuel cell comprising a gas diffusion substrate as claimed in any one of claims 14,
10 15 and 16.

25. A fuel cell comprising a gas diffusion electrode as claimed in any one of claims 17,
18 and 19.


1444

16

Abstract of the Invention**SUBSTRATES**


A non-woven fibre web comprising a plurality of fibres in the x- and y-direction of average length greater than 5mm and a plurality of fibres of average length less than 3mm wherein at least a proportion of the fibres of average length less than 3mm are orientated in the z-direction, and wherein the proportion of fibres of average length less than 3mm is at least 20% of the total weight of fibres, and wherein the density of the non-woven fibres web is from 0.1g/cm^3 to 0.35g/cm^3 is disclosed. Also disclosed is a gas diffusion substrate, a gas diffusion electrode and a membrane electrode assembly comprising said non-woven fibre web.

Figure 1 Cell potential versus current density - air operation

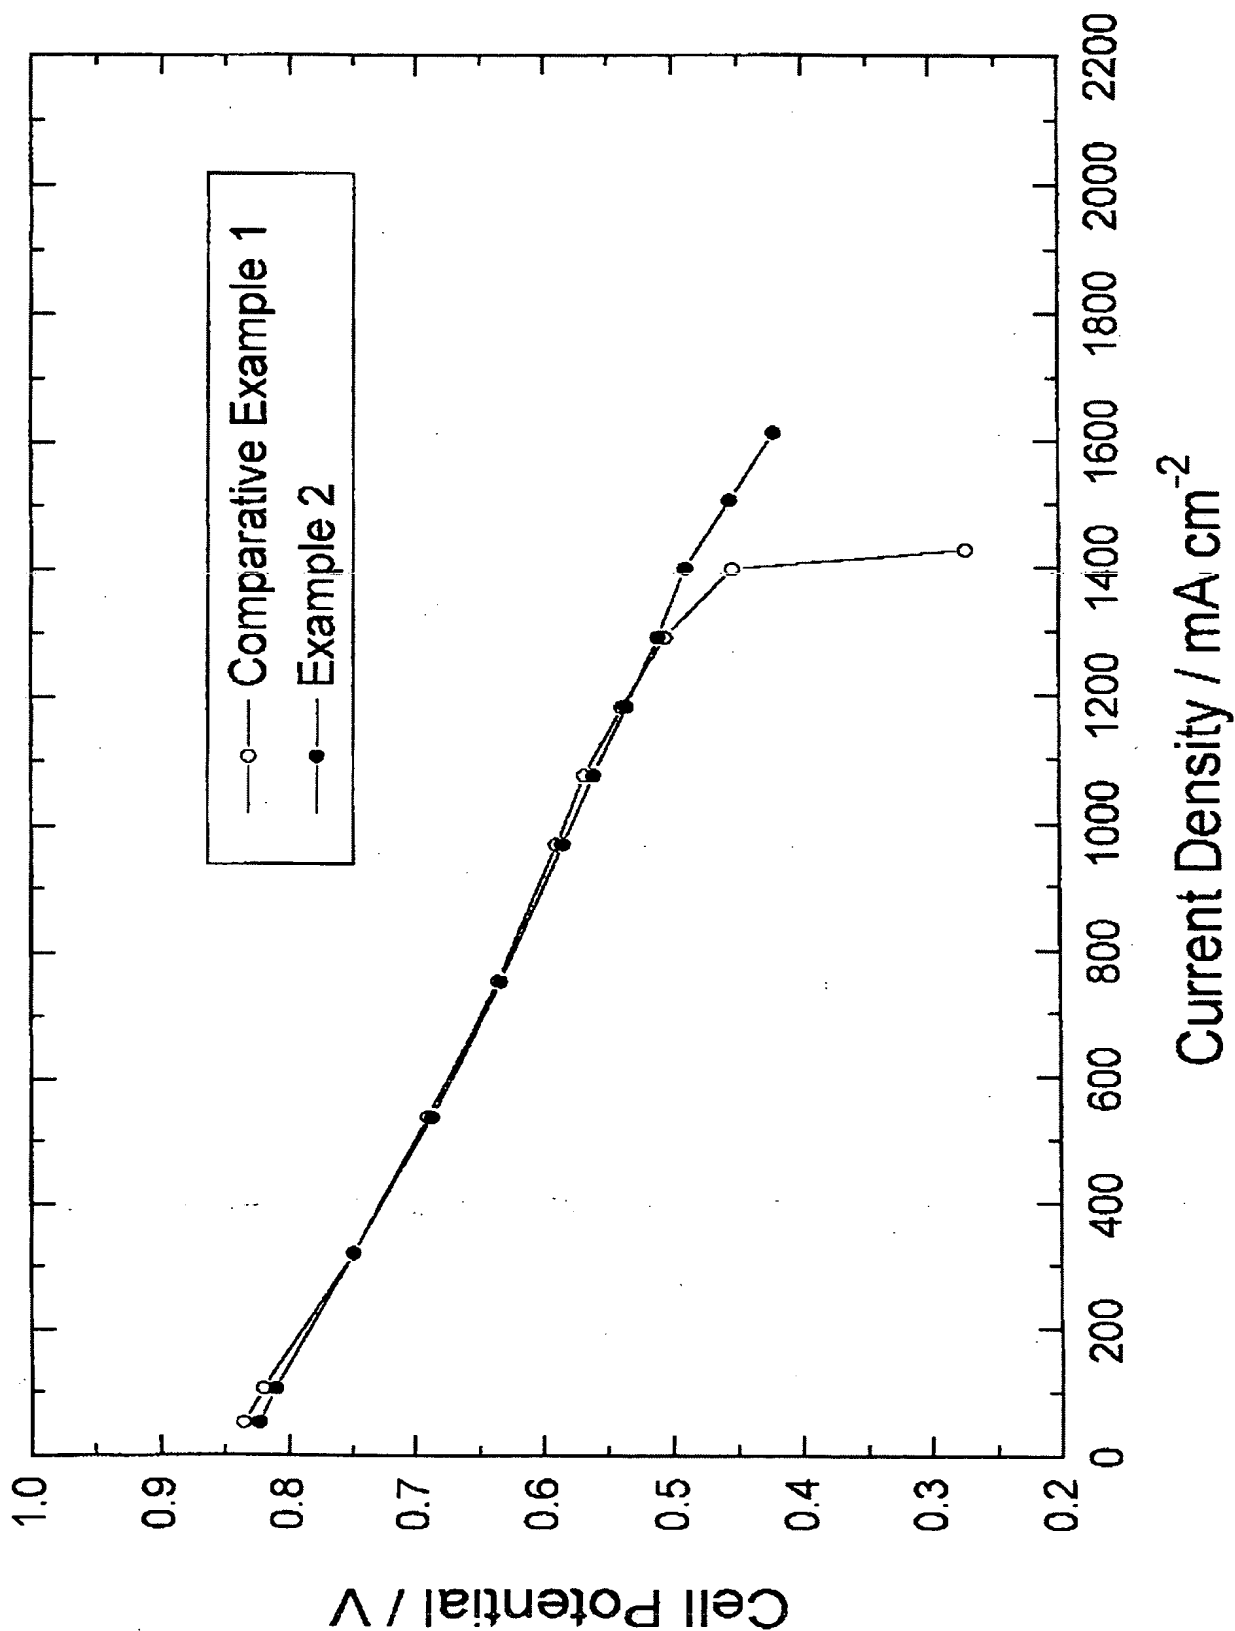

THIS PAGE BLANK (USPTO)

Figure 2 Cell potential versus current density - oxygen operation

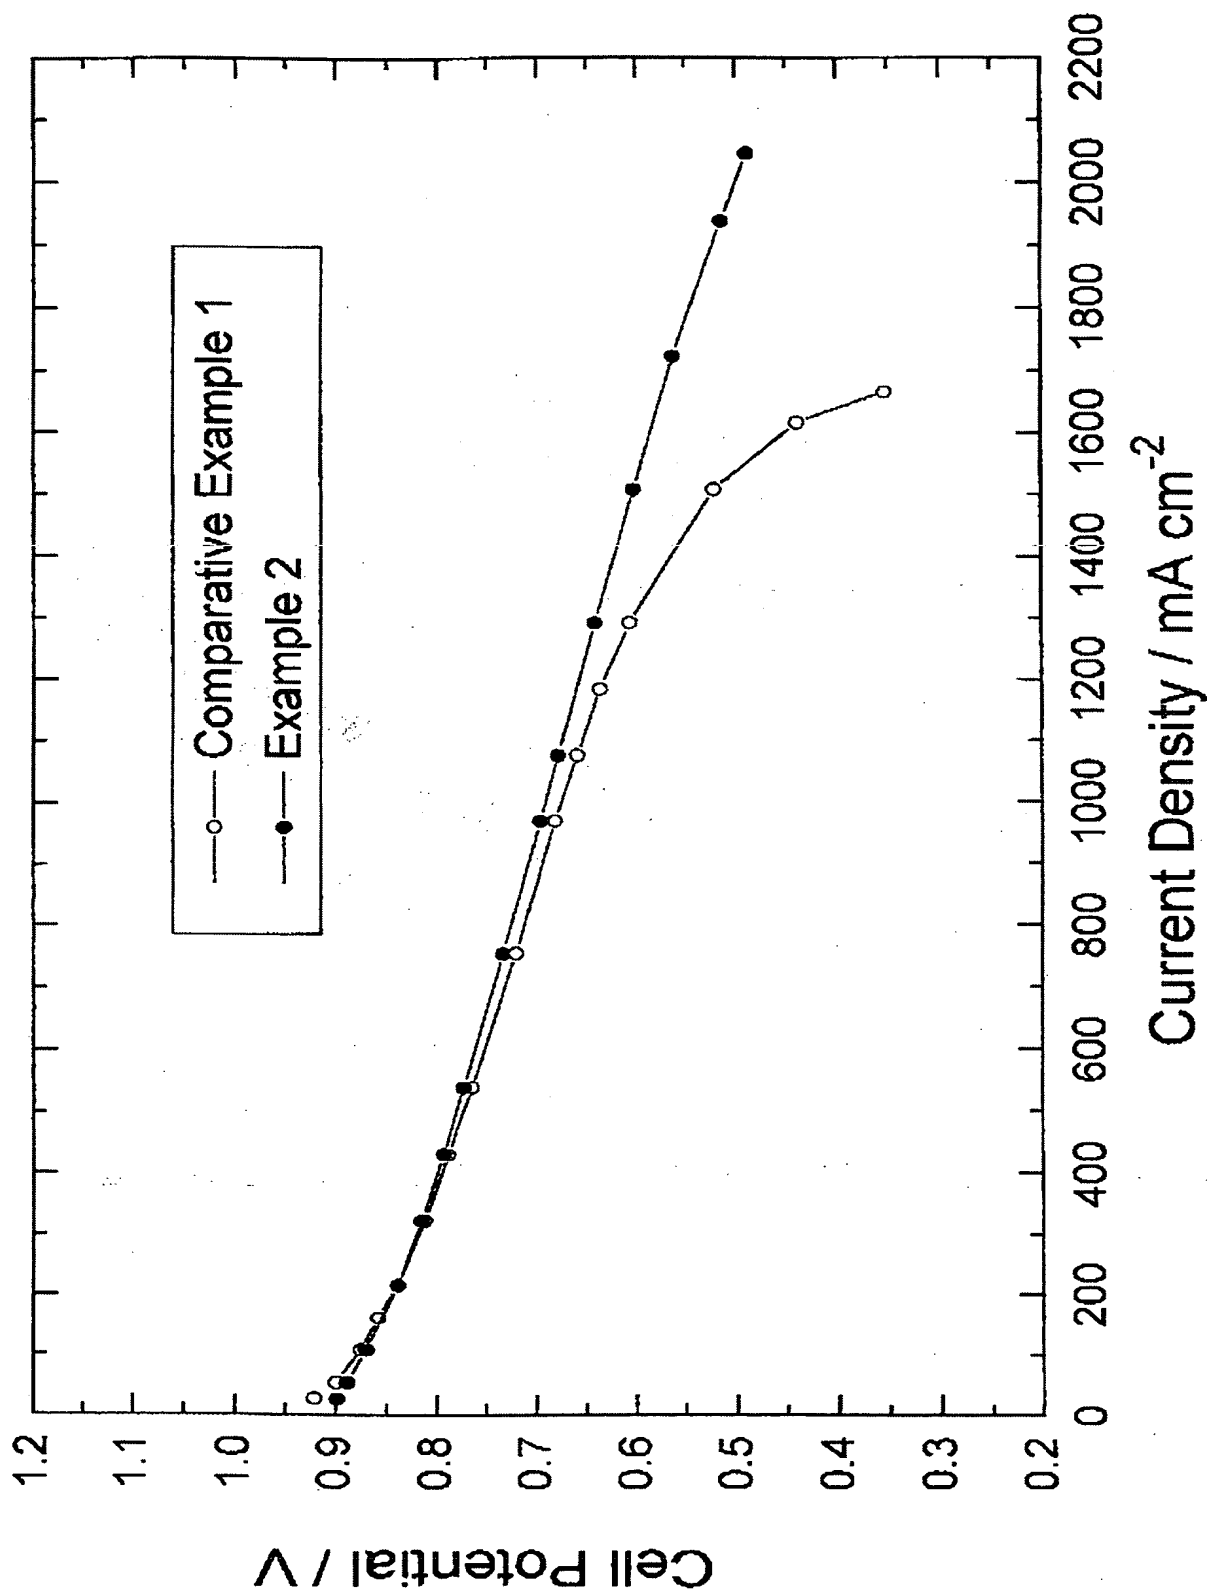

716800 / 003990

F 23 Filed 9/2/00

Johnson, Matthew

Tech. Centre.

THIS PAGE BLANK (USPTO)

THIS PAGE BLANK (USPTO)